


User  
Manual

AMP  
Power Amplifier

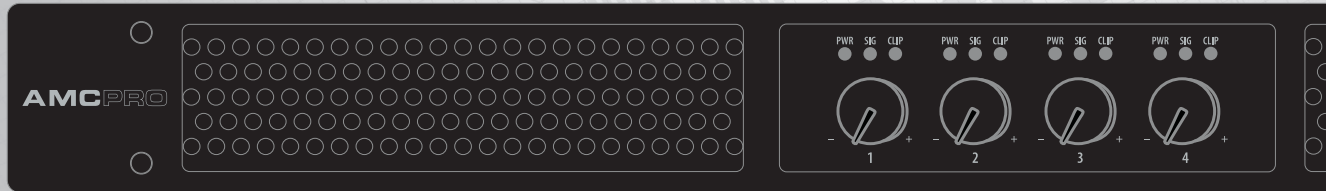


Minimum Usage  
Maximum Usage 65min

# Safety instructions

When using this electronic device, basic precautions should always be taken, including the following:

- 1 Read all instructions before using the product.
- 2 Do not use this product near water (e.g., near a bathtub, washbowl, kitchen sink, in a wet basement or near a swimming pool etc).
- 3 Use this device when you are sure that amplifier has a stable base and it is fixed securely.
- 4 This product, in combination with loudspeakers and amplifier may be capable of producing sound levels that could cause permanent hearing loss. Do not operate for a long period of time at a high volume level or at a level that is uncomfortable. If you experience any hearing loss or ringing in the ears, you should consult with otorhinolaryngologists.
- 5 The product should be located away from heat sources such as radiators, heat vents, or other devices that produce heat.
- 6 The product should be connected to a power supply that is described in the operating instructions or are marked on the product.
- 7 The power supply should be undamaged and never share an outlet or extension cord with other devices. Never leave device plugged into the outlet when it is not being used for a long period of time.
- 8 Care should be taken that objects do not fall into liquids and liquids would not be spilled on the device.
- 9 The product should be serviced by qualified service personnel if:
  - The power supply or the plug has been damaged.
  - Objects have fallen into or liquid has been spilled on the product.
  - The product has been exposed to air.
  - The product has been dropped or the enclosure damaged.
- 10 There are some areas with high voltage inside, to reduce the risk of electric shock do not remove cover of the microphone receiver or power supply. The cover should be removed by the qualified personnel only.

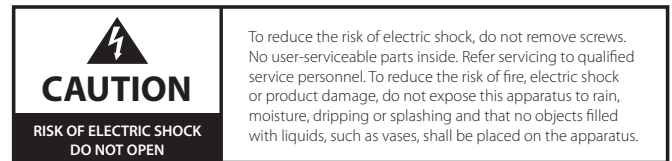



# Table of contents

## Before you start

Introduction.....	4
Features.....	4

## Operation

Front panel.....	5
Rear panel.....	6
Front panel functions.....	7
Rear panel functions.....	7

## Specifications

General specifications.....	8
-----------------------------	---

# Before you start


Highly efficient Class D amplifier designed in a slim 1 rack unit gives a choice to drive 8  $\Omega$ , 4  $\Omega$ , and 2  $\Omega$  speakers also ensures increased power density and better audio performance. Amplifiers are customized to use in live sound systems, great for night clubs and discos.

## FEATURES

- D class power amplifier
- Switching power supply
- Designed to drive 2  $\Omega$  speakers
- Soft start
- 1 rack unit size
- Variable speed cooling FAN
- Balanced XLR inputs
- LINK outputs
- Powercon for connecting mains power
- Signal clipping indicator
- Overload protection


# Operation

Front Panel | AMP 4X500

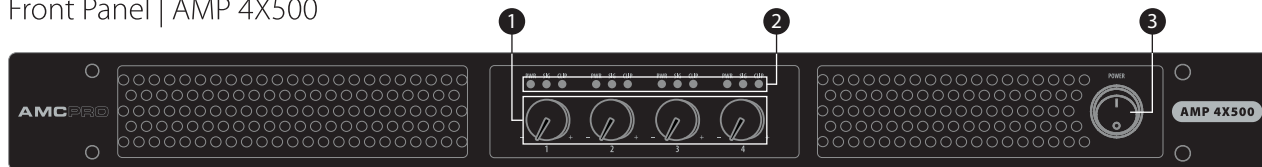

1. Volume controls | 2. LED indicators | 3. Power switch


Front Panel | AMP 1500, AMP 500

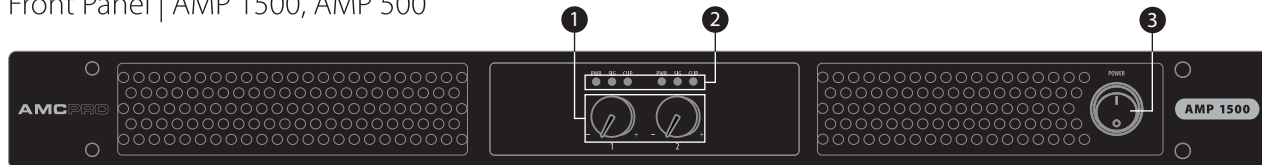

1. Volume controls | 2. LED indicators | 3. Power switch


# Operation

## Rear Panel | AMP 4X500

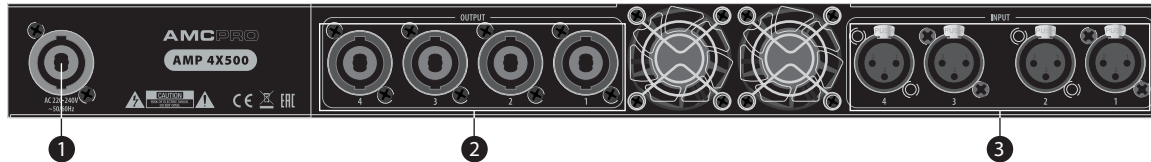

1. Mains power connector | 2. Output connectors | 3. Input connectors

## Rear Panel | AMP 1500, AMP 500

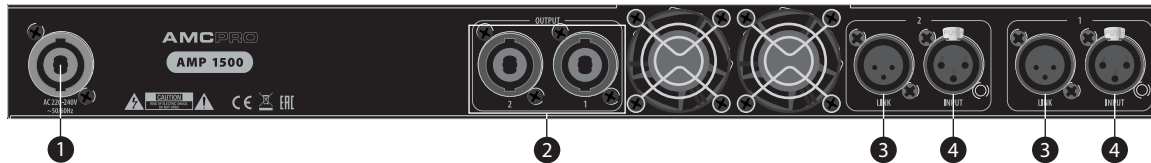

1. Mains power connector | 2. Output connectors | 3. Link connectors | 4. Input connectors



# Operation

## Front panel functions

### **VOLUME CONTROLS**

Rotary knobs for adjusting the volume level of the selected channel.

### **LED INDICATORS**

The power LED indicator illuminates when the power is turned "ON".

The signal LED indicator illuminates when the input signal is greater than -14 dBu is present.

The clip LED indicator when the input signal is greater than +3 dBu is present. Occasional blinking is acceptable, but if LED lights on more than intermittently, turn down either the power amplifier level or reduce the output level of the preceding component to avoid audible distortion.

### **POWER SWITCH**

Switch amplifier power ON or OFF.

## Rear panel functions

### **MAINS POWER CONNECTOR**

Power connector for mains power.

### **AMPLIFIER OUTPUT CONNECTORS**

Audio outputs designed to connect speakers by using Speakon type connector.

### **AMPLIFIER INPUT CONNECTORS**

Input connector designed to connect external audio signals.

### **AMPLIFIER LINK CONNECTORS**

Connect outgoing audio signal from input connectors to additional amplifier. Input and link connectors are connected with each other directly.

# General Specifications

AMP 500, AMP 1500, AMP 4X500 Power Amplifiers

	<b>AMP 500</b>	<b>AMP 1500</b>	<b>AMP 4X500</b>
Power supply	AC 220-240 V, 50/60 Hz		
Channels	2	2	4
Output power 8Ω	2x350 W	2x800 W	4x350 W
Output power 4Ω	2x500 W	2x1500 W	4x500 W
Output power 2Ω	2x600 W	2x1800 W	4x600 W
Output connectors	Speakon		
Input/Link	Balanced XLR		
Input Impedance	20 kΩ		
Input gain	2dBu		
Frequency Response	20 Hz – 20 kHz		
THD+N	< 0.1%		
S/N ratio	> 105 dB		
Crosstalk	> 75 dB		
Cooling	Forced air cooling		
Dimensions (H x W x D)	483 mm x 375 mm x 44 mm		
Weight	5,6 kg	7 kg	7,2 kg

The specifications are correct at the time of printing this manual. For improvement purposes, all specifications for this unit, including design and appearance, are subject to change without prior notice.